

SPIROL®

PIN INSTALLATION TECHNOLOGY

Model CR Semi-Automatic Pin Inserter

This robust, vertical pin insertion machine is ideally suited for moderate to high production for applications requiring up to 1,800 lbs. of installation force. A retractable pin orientation head, mounted on a shaft/linear bearing arrangement moves up and down for ease of loading and unloading of the components to be assembled. The insertion bushing is positioned close to the part for smooth, trouble free installation.

The orientation head shuttles the pin from the feeding position to the installation position, and also functions as a selector, preventing longer or shorter pins from being installed. A two position trap door allows for easy clear-out of the feed tube.

Design Features/Benefits:

- Precise:**
- Fine insertion depth adjustment
 - Dowelled component location
 - Ground base plate to ensure perpendicularity between insertion quill and application
- Built to Last:**
- Cushioned cylinder return stroke
 - Hardened pin guide bushings and hard coated vibratory feeder bowl
- Versatile:**
- Can be easily configured to accommodate a variety of applications
- Efficient:**
- Automatically delivers pin to the installation site eliminating the need to touch the pin during entire assembly process
- Safe:**
- Guarded pinch points and anti-tie down, anti-repeat dual activation sensors (or optional foot switch with integrated finger protection unit)

Optional alignment fixtures available.

Guard is standard
with all machines

—
Shown with
optional fixture



Dual and triple versions of the Model CR are readily available to suit your assembly objectives. Options such as rotary index tables, pin sensing, force monitoring, and drilling and pinning combinations can be added for enhanced productivity and heightened error-proofing.

Europe **SPIROL United Kingdom**
17 Princewood Road
Corby, Northants
NN17 4ET United Kingdom
Tel: +44 (0) 1536 444800
Fax: +44 (0) 1536 203415

SPIROL France
Cité de l'Automobile ZAC Croix Blandin
18 Rue Léna Bernstein
51100 Reims, France
Tel: +33 (0) 3 26 36 31 42
Fax: +33 (0) 3 26 09 19 76

SPIROL Germany
Ottostr. 4
80333 Munich, Germany
Tel: +49 (0) 89 4 111 905 71
Fax: +49 (0) 89 4 111 905 72

SPIROL Spain
Plantes 3 i 4
Gran Via de Carles III, 84
08028, Barcelona, Spain
Tel/Fax: +34 932 71 64 28

SPIROL Czech Republic
Evropská 2588 / 33a
160 00 Prague 6-Dejvice
Czech Republic
Tel: +420 226 218 935

SPIROL Poland
ul. Solec 38 lok. 10
00-394, Warsaw, Poland
Tel. +48 510 039 345

Americas **SPIROL International Corporation**
30 Rock Avenue
Danielson, Connecticut 06239 U.S.A.
Tel. +1 860 774 8571
Fax. +1 860 774 2048

SPIROL Shim Division
321 Remington Road
Stow, Ohio 44224 U.S.A.
Tel. +1 330 920 3655
Fax. +1 330 920 3659

SPIROL Canada
3103 St. Etienne Boulevard
Windsor, Ontario N8W 5B1 Canada
Tel. +1 519 974 3334
Fax. +1 519 974 6550

SPIROL Mexico
Avenida Avante #250
Parque Industrial Avante Apodaca
Apodaca, N.L. 66607 Mexico
Tel. +52 81 8385 4390
Fax. +52 81 8385 4391


SPIROL Brazil
Rua Mafalda Barnabé Soliane, 134
Comercial Vitória Martini,
Distrito Industrial,
CEP 13347-610, Indaiatuba, SP, Brazil
Tel. +55 19 3936 2701
Fax. +55 19 3936 7121

Asia Pacific **SPIROL Asia Headquarters**
1st Floor, Building 22, Plot D9, District D
No. 122 HeDan Road
Wai Gao Qiao Free Trade Zone
Shanghai, China 200131
Tel: +86 (0) 21 5046-1451
Fax: +86 (0) 21 5046-1540

SPIROL Korea
16th Floor, 396 Seocho-daero,
Seocho-gu, Seoul, 06619, South Korea
Tel: +82 (0) 10 9429 1451

e-mail: info-uk@spirol.com

SPIROL.co.uk

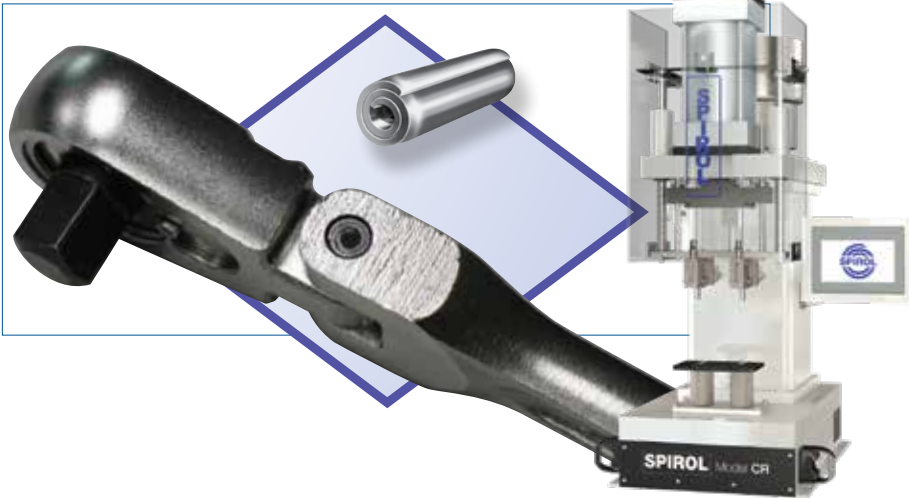

Application:

A major manufacturer of hand tools was experiencing difficulty installing an Ø8mm Solid Grooved Pin into a pivot joint of a Flexible Head Ratchet tool. The tolerance on the diameter of the hole resulted in the Grooved Pin either being too difficult to install, which required time-consuming secondary effort, or too easy to install, which resulted in a pin retention issue during use. The previous method of assembly consisted of manually placing the Grooved Pin in the hole, loading the assembly into a press, and activating the press ram. This assembly process took approximately 15 seconds, and the scrap rate approached 5%.

Solution:

SPIROL's Application Engineers recommended that the Solid Pin be replaced with an Ø8mm **Heavy Duty Coiled Pin**. The Coiled Pin's design enables it to absorb the wide hole tolerance without any adverse effects on performance. In addition, the unique characteristics of the Coiled Pin provides enough strength to withstand the forces generated during use, and the flexibility to absorb repetitive loading. The Coiled Pins are installed with **SPIROL's** standard **Model CR Automatic Pin Inserter**. The operator simply loads the assembly into a fixture, and then touches the dual optical actuation switches. Once the machine is activated, the insertion head advances, installs the pin, retracts and resets for the next cycle. This process is completed in only 5 seconds.

SPIROL provided the complete assembly solution. The reduction in assembly time and scrap paid for the machine in eight months.

SPIROL offers complimentary Application Engineering support. We will assist on new designs as well as help resolve issues, and recommend cost savings on existing designs. Let us help by visiting **Application Engineering Services** on SPIROL.co.uk.